Template for IST Tubular Smart Lock with SFK Plate in 5-1/2" CTC

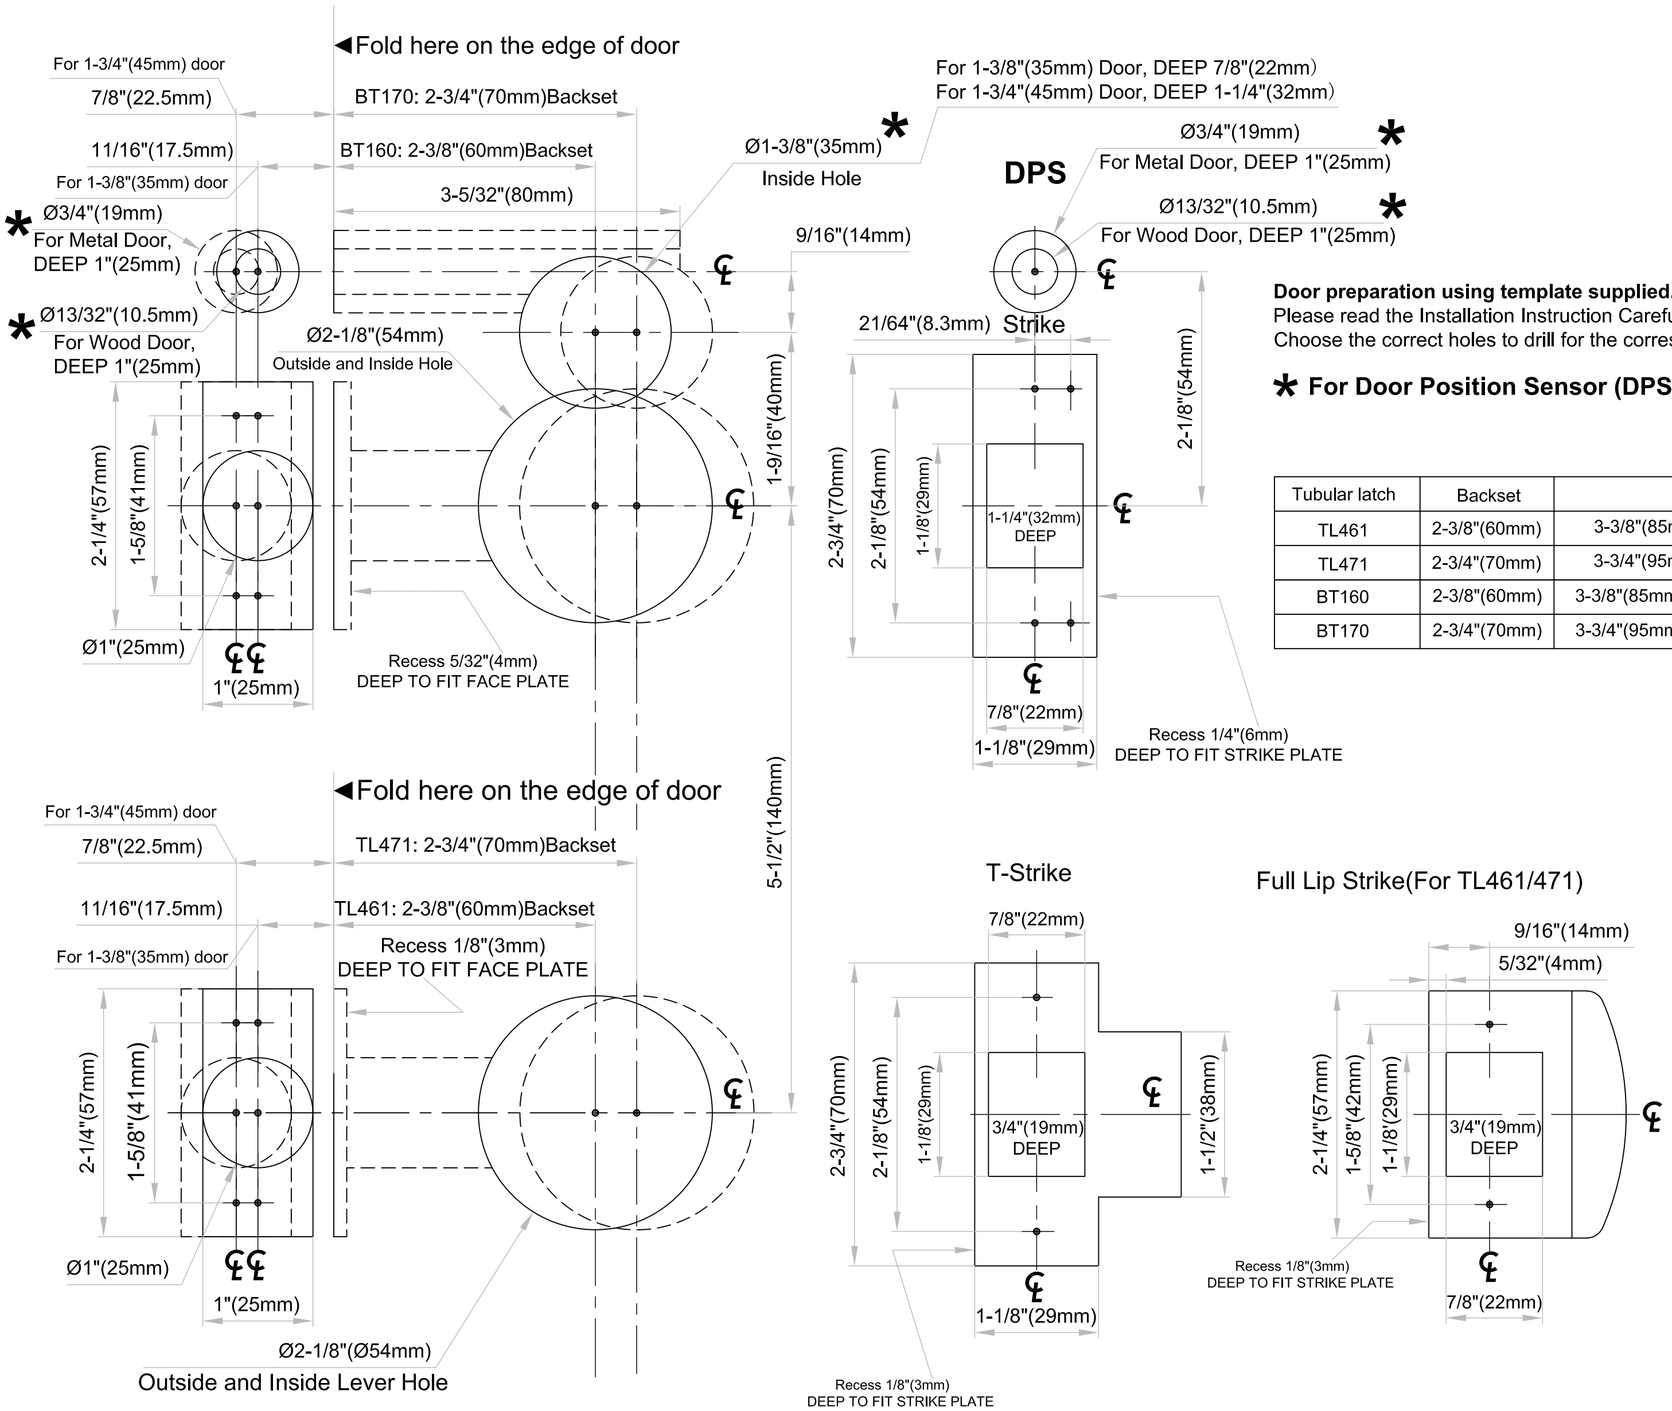

Door preparation using template supplied.
Please read the Installation Instruction Carefully before drilling any holes on the door.
Choose the correct holes to drill for the corresponding functions.

*** For Door Position Sensor (DPS) only.**

Tubular latch	Backset	Case Side
TL461	2-3/8"(60mm)	3-3/8"(85mm)x7/8"(22mm)x7/8"(22mm)
TL471	2-3/4"(70mm)	3-3/4"(95mm)x7/8"(22mm)x7/8"(22mm)
BT160	2-3/8"(60mm)	3-3/8"(85mm)x15/16"(24mm)x15/16"(24mm)
BT170	2-3/4"(70mm)	3-3/4"(95mm)x15/16"(24mm)x15/16"(24mm)

Dimensions do not provide allowances for door silencers,
weather stripping, sound proofing or other additions to door or door frames.

PM-TMISTL4-512
V20240112