


Template for ISM-MC7000 (2-3/4" Backset) Smart Mortise Lock With SFK (Keypad) Plate

Case Size: 4" x 6-7/32" x 1" (102mm x 158mm x 25mm)
Backset: 2-3/4" (70mm)
Lock Front: 1-1/4" x 8" x 1/4" (32mm x 203mm x 6mm)

Knob or Lever to Cylinder: 3-55/64" (98mm)
Knob or Lever to Turn Piece: 2-11/16" (68mm)

Door preparation using template supplied.
Please read the Installation Instruction Carefully before drilling any holes on the door.
Choose the correct holes to drill for the corresponding functions.

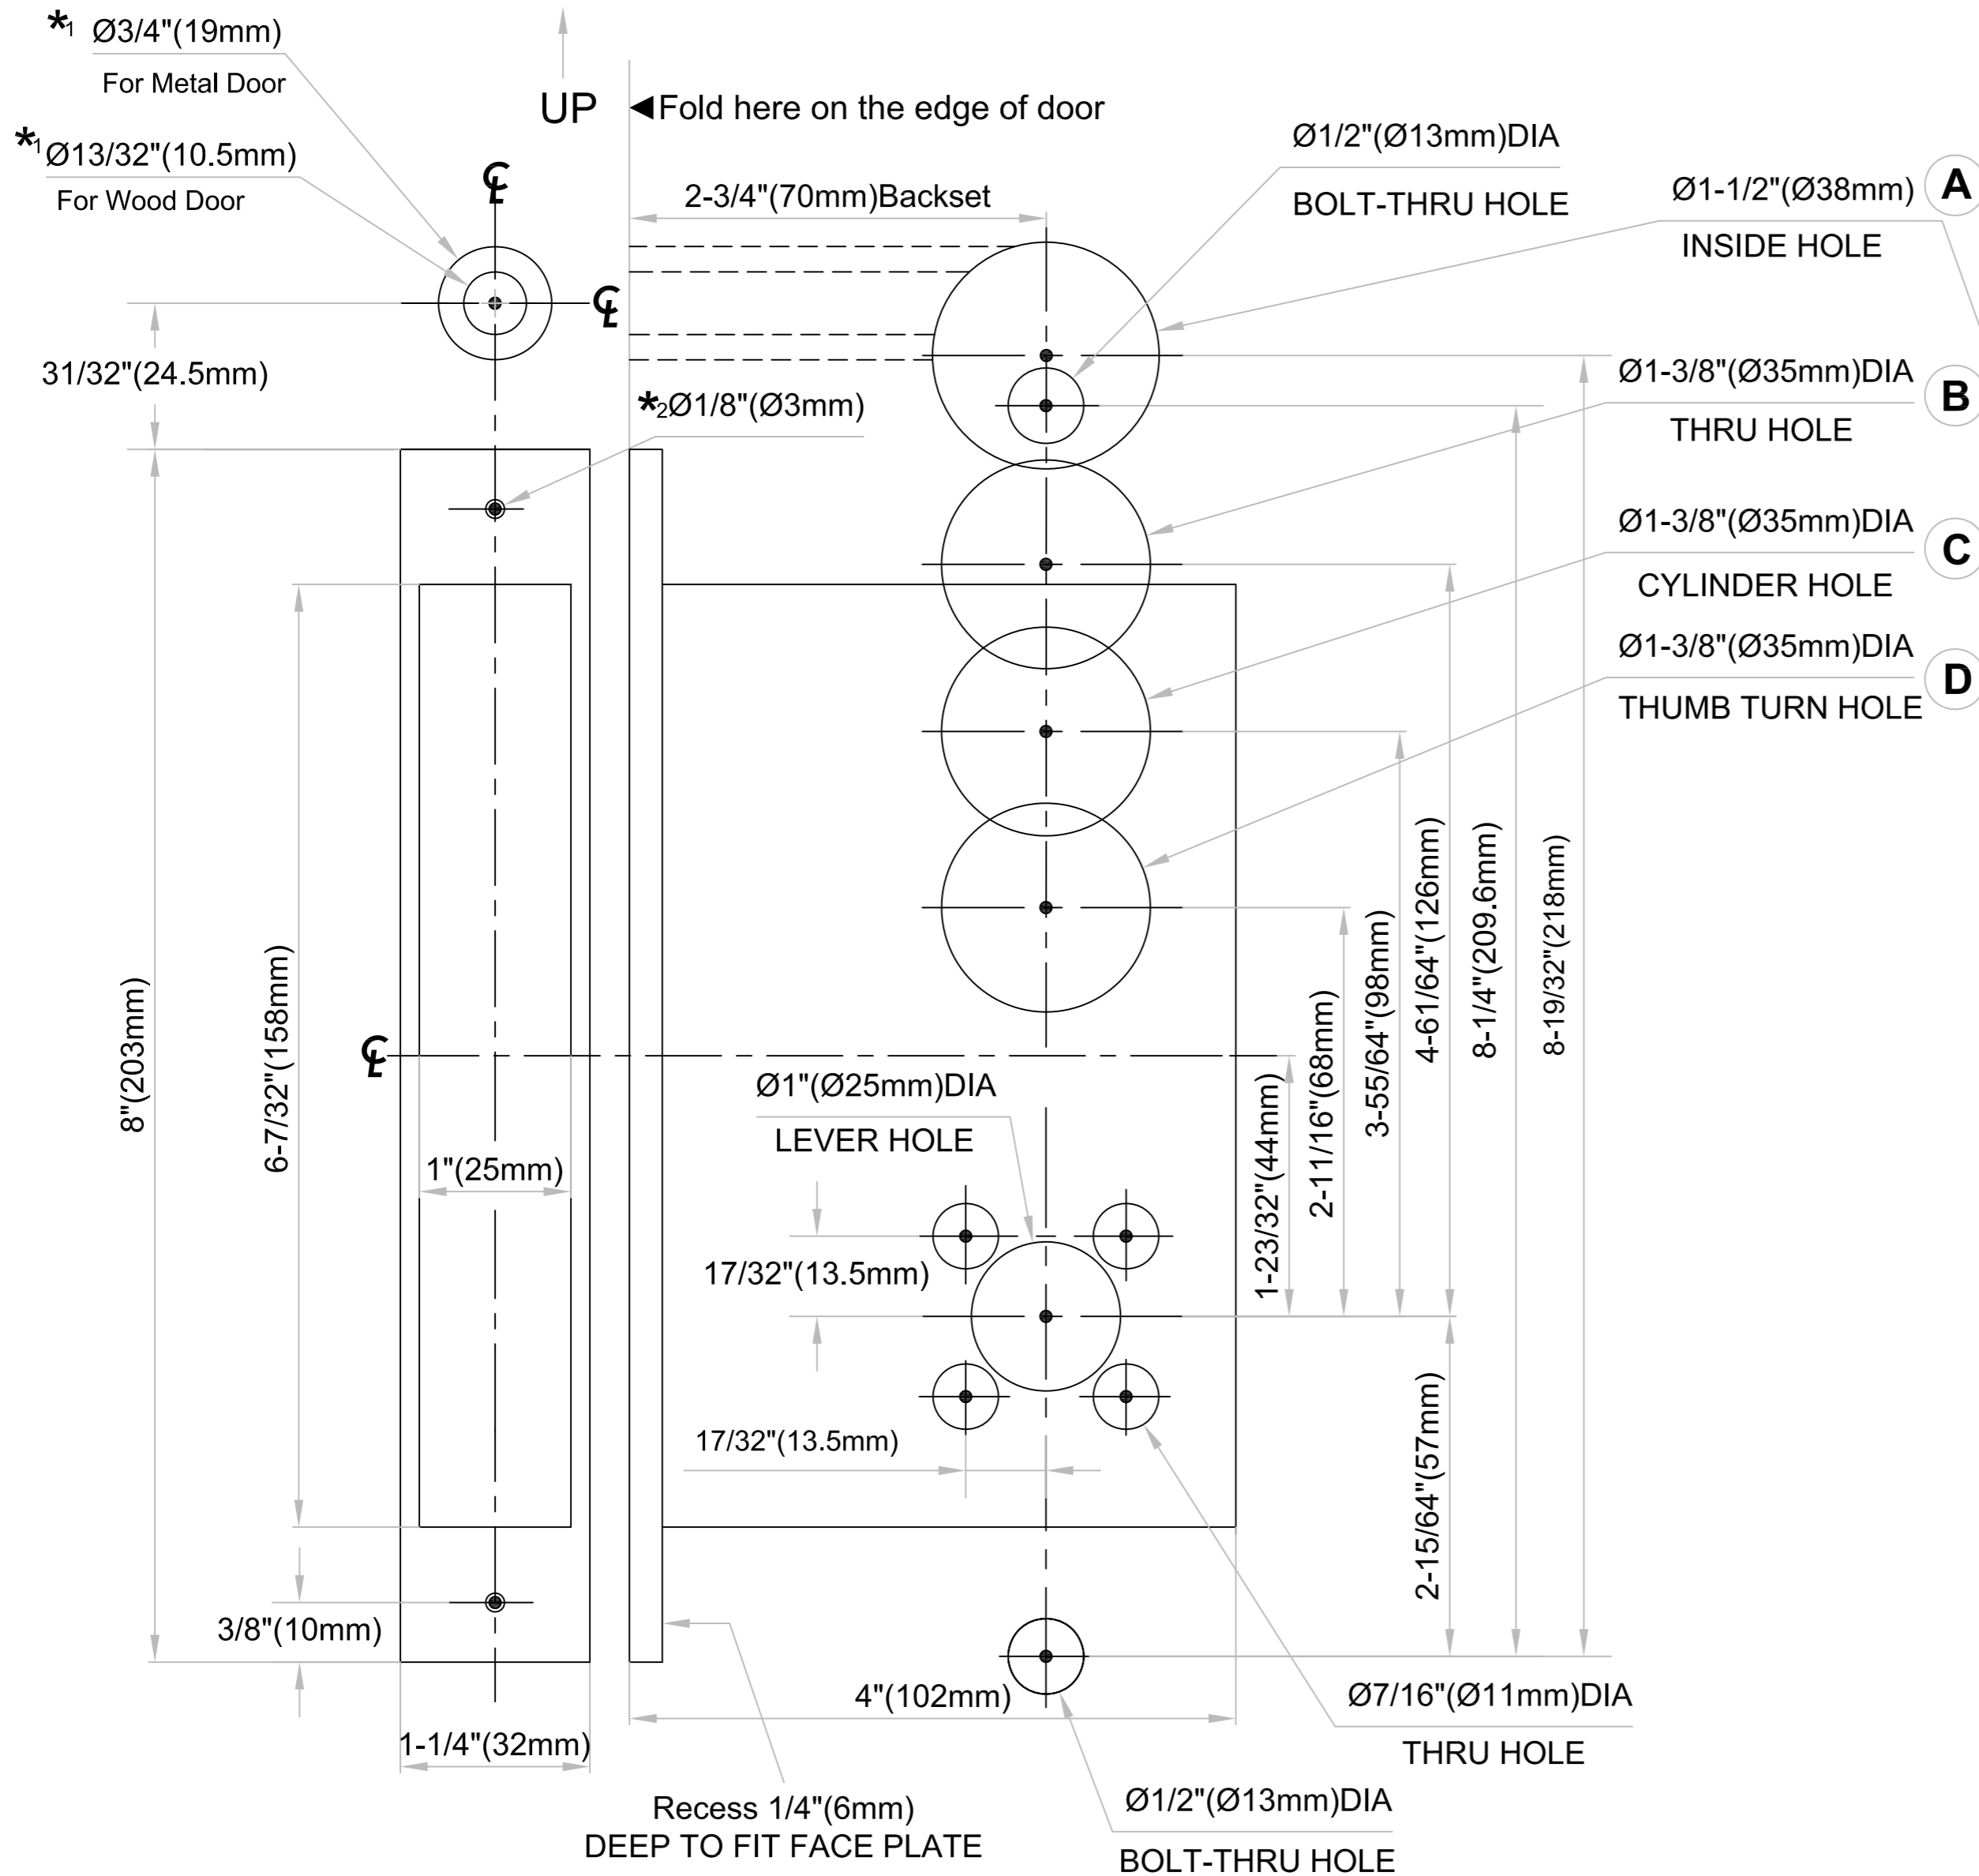

- *₁ For Door Position Sensor (DPS) only.
- *₂ For Hollow Metal Doors, tap where indicated for #12x24 machine screws

*₁ For 1-3/4" (45mm) Door, DEEP 1-1/4" (32mm)
For 1-3/8" (35mm) Door, DEEP 7/8" (22mm)

Door preparation using template supplied.

***Make sure the correct lock function, Entry or Privacy or Passage and Drill the necessary holes only.

Function	Item Ref.	Outside Holes				Inside Holes			
		A	B	C	D	A	B	C	D
Entry	MC7438		●	●		●	●		●


Dimensions do not provide allowances for door silencers, weather stripping, sound proofing or other additions to door or door frames.

FOR OPPOSITE HAND
PLEASE SEE REVERSE SIDE

Template for ISM-MC7000 (2-3/4" Backset) Smart Mortise Lock With SFK (Keypad) Plate

Case Size: 4" x 6-7/32" x 1" (102mm x 158mm x 25mm)
Backset: 2-3/4" (70mm)
Lock Front: 1-1/4" x 8" x 1/4" (32mm x 203mm x 6mm)

Knob or Lever to Cylinder: 3-55/64" (98mm)
Knob or Lever to Turn Piece: 2-11/16" (68mm)

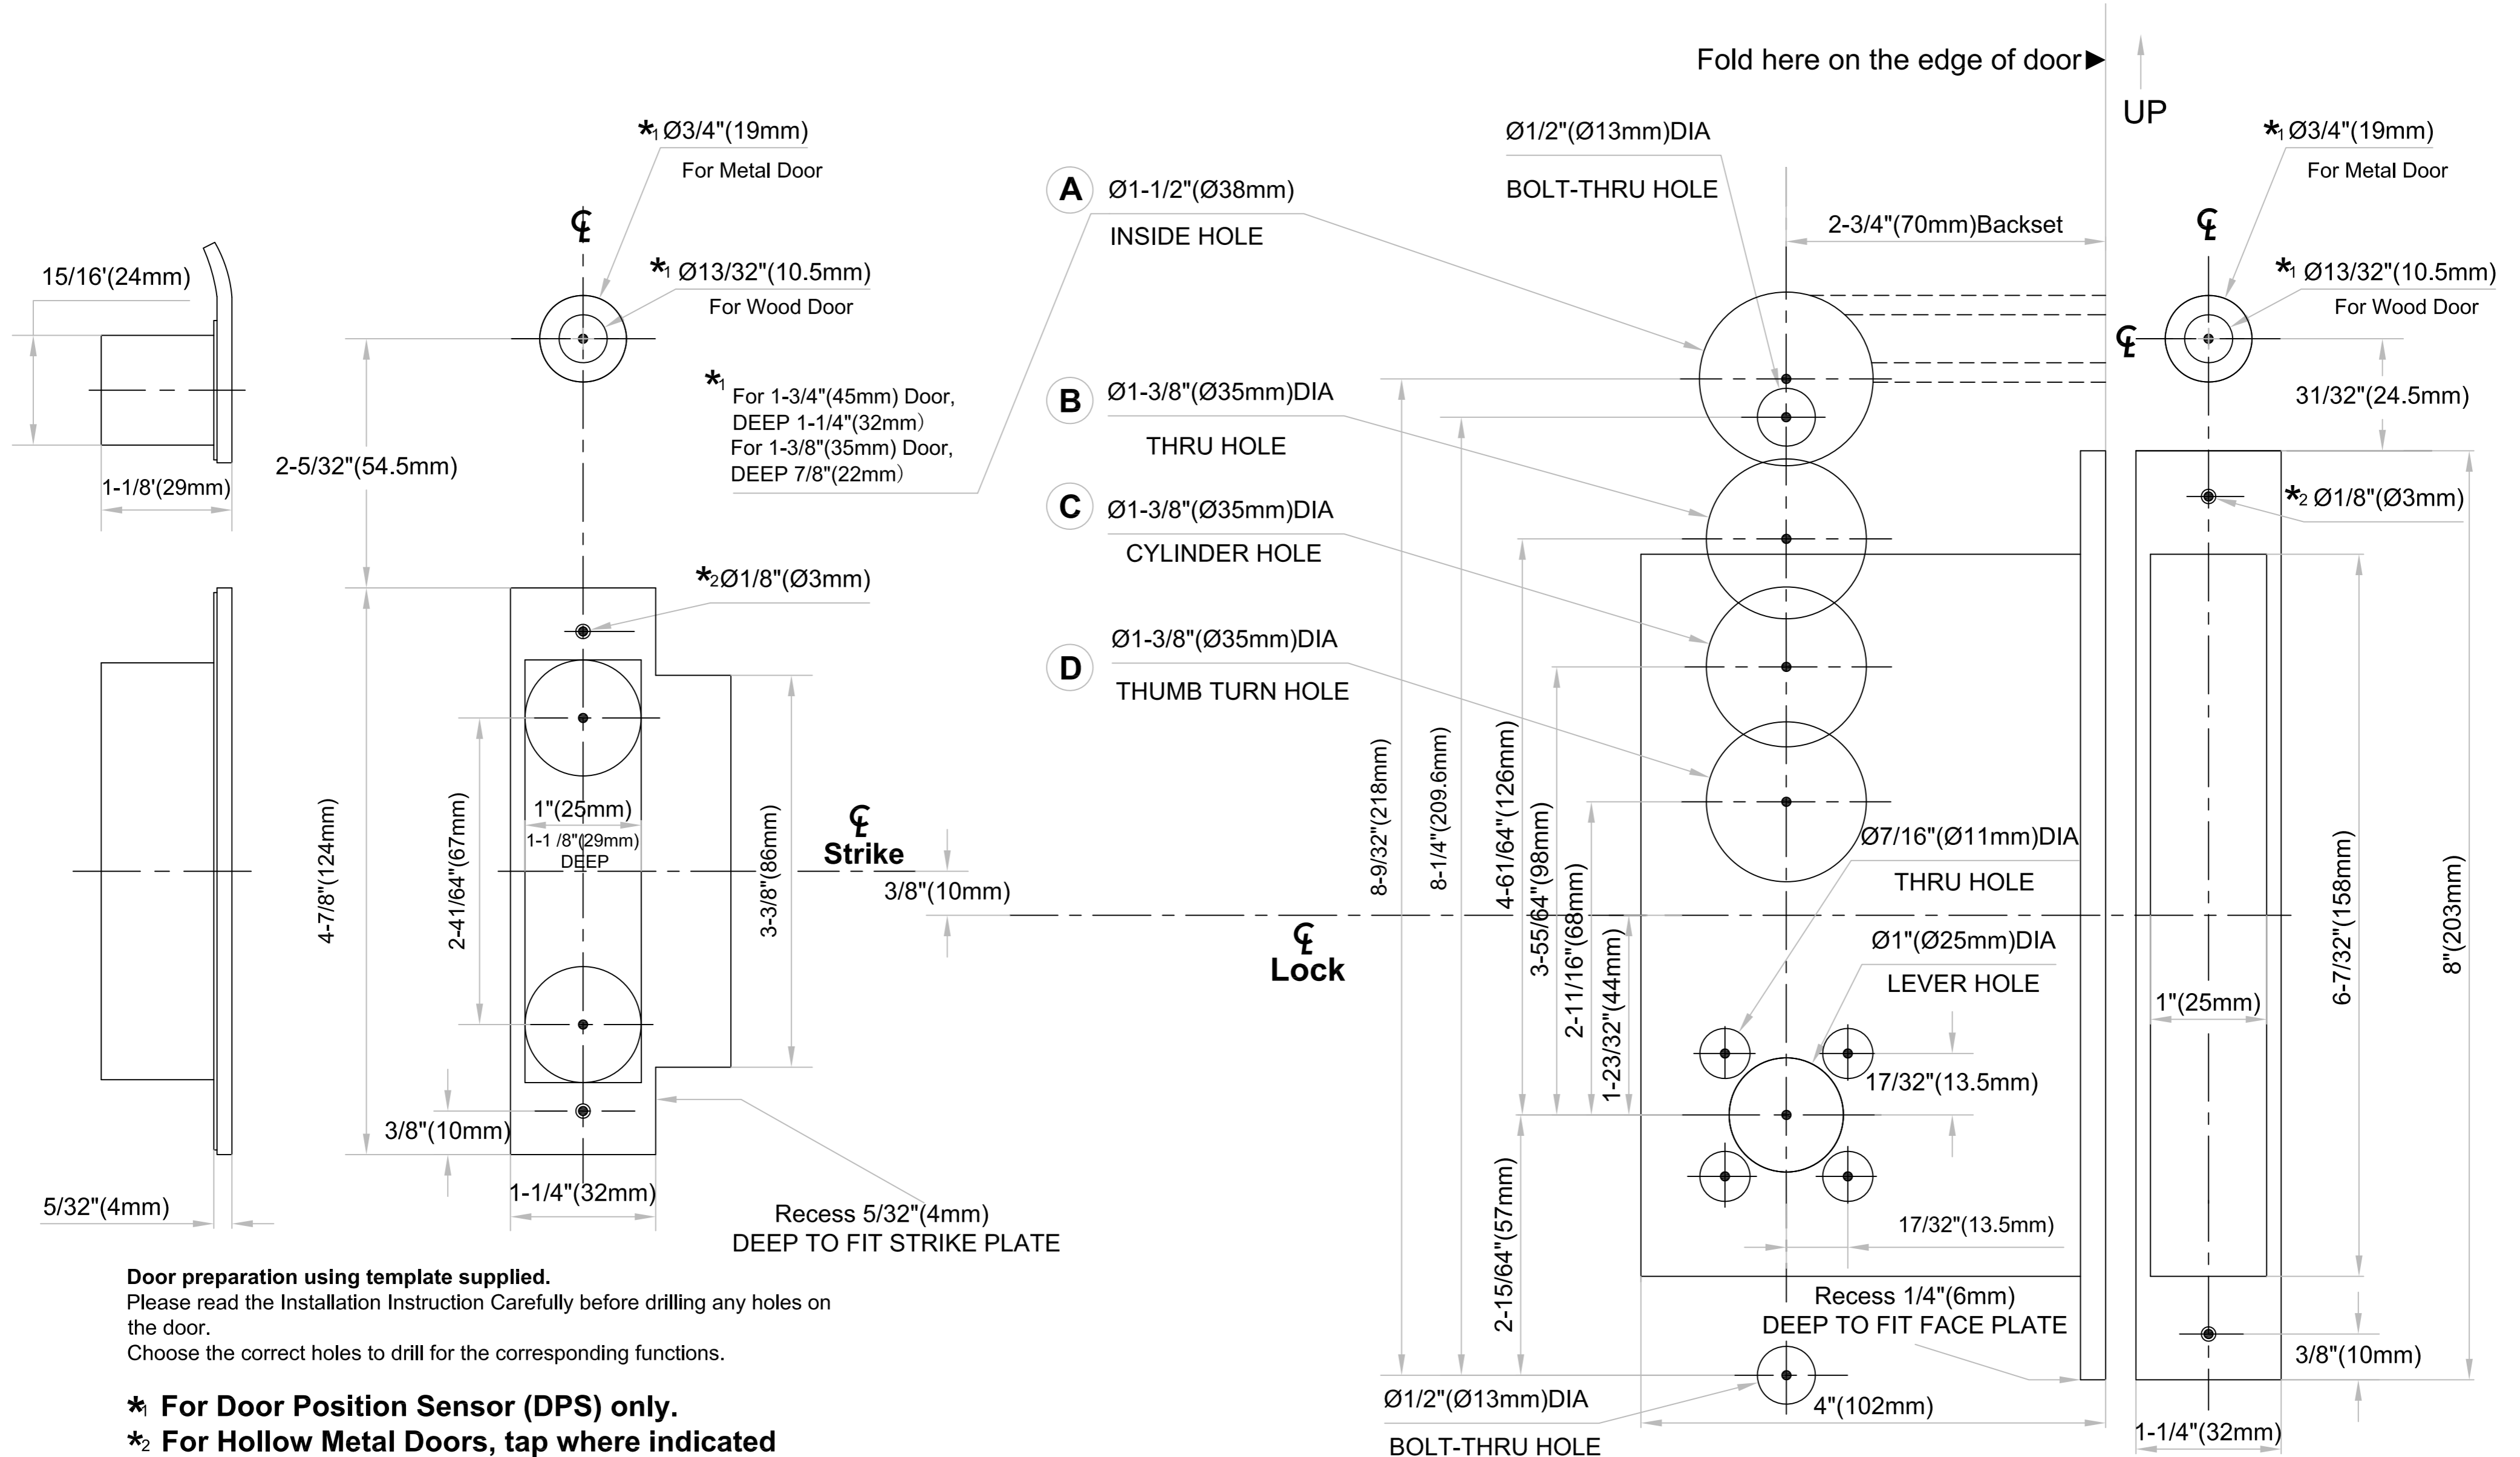

Door preparation using template supplied.

Please read the Installation Instruction Carefully before drilling any holes on the door.
Choose the correct holes to drill for the corresponding functions.

***₁ For Door Position Sensor (DPS) only.**

***₂ For Hollow Metal Doors, tap where indicated for #12x24 machine screws**

Dimensions do not provide allowances for door silencers, weather stripping, sound proofing or other additions to door or door frames.

FOR OPPOSITE HAND
PLEASE SEE REVERSE SIDE